PT500 (floor)



ROOM SENSOR

PT500 (ceiling)




ROOM SENSOR


Electric heater



DSCA8-DM




EVS-1-xx-DM





Induction Motor

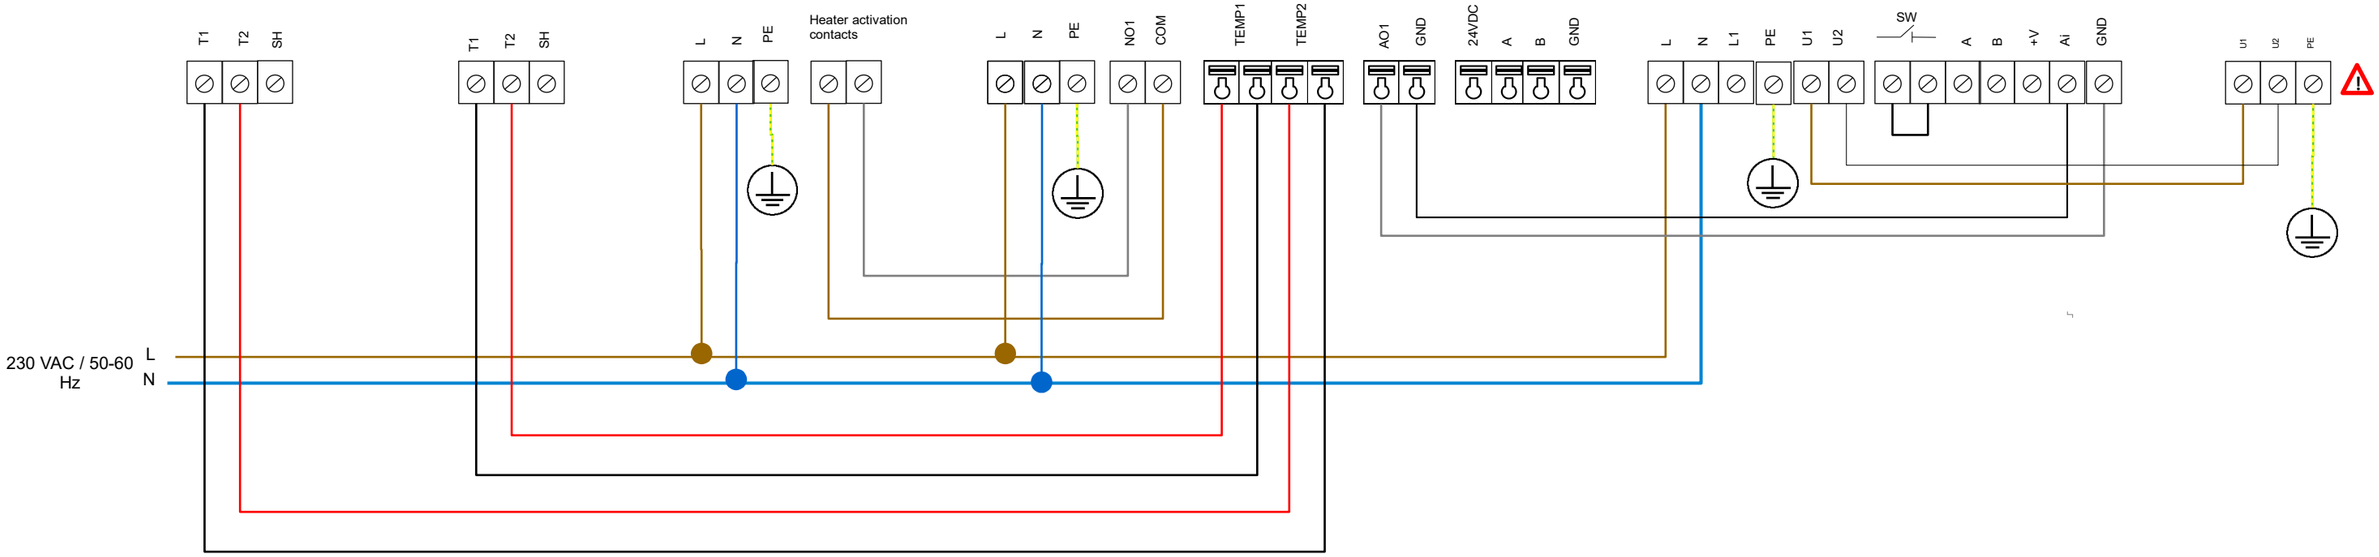

⚠ Consult the fan manufacturer for the correct wiring.

Sentera products		External products	Parameters settings			
Article codes	**Description**		**Article codes**	**Parameters**	**Values**	**Descriptions**
DSCA8-DM **EVS-1-xx-DM** **PT500** **PT500**	Destratification controller to regulate ceiling fans that redistribute warm air trapped at the ceiling down to the floor level. Destratification realises significant energy savings in colder climates by reducing heat losses through the ceiling. During hot summer days, the ceiling fans can provide a cooling breeze. The difference between ceiling temperature and floor temperature is measured with optional PT500 sensors. Fan speed increases as the difference between both temperatures increases. The analogue output connected to EVS speed controller which controls AC fan speed	**Induction Motor** **Electric heater** **AC fans**				

This document is to be treated as an example or guideline only. Sentera bears no responsibility for any misprints, misinterpretations or mistakes in this document.
Consult our disclaimer on https://www.sentera.eu/

Release date: 03/11/2026