

ATR-1

230 VAC autotransformers, terminal blocks

Autotransformers, open model, for switchboard mounting, to control the rotational speed of voltage controllable motors (230 VAC, 50/60 Hz) (fans, pumps, among others).


When choosing a transformer, it is important to know the maximum current intensity consumption. The given intensity can be taken from every tapping.

FEATURES


- According to: EN61558-2-13
- Compact design
- Connecting terminal blocks, finger proof, IP20
- Mounting brackets
- Insulation class: T60/F
- Dielectric sensitivity: 2.500 V
- Maximal admissible temperature: 155 °C
- Maximal ambient temperature: 35 °C

	Imax (A)
ATR-1-08L20	0.8
ATR-1-15L25	1.5
ATR-1-25L25	2.5
ATR-1-35L25	3.5
ATR-1-50L25	5.0
ATR-1-75L25	7.5
ATR-1100L25	10.0
ATR-1130L25	13.0
ATR-1160L20	16.0
ATR-1200L20	20.0

WIRING DIAGRAM

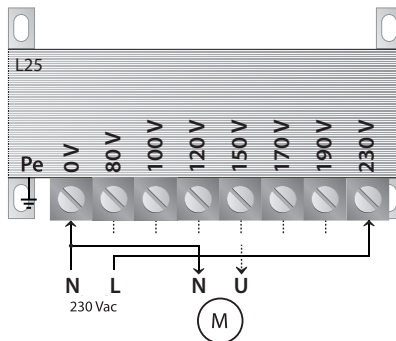

DIMENSIONS



	A	B	C	D	E	weight
ATR-1-08L20	75	65	83	62,5	42,5	1.10 kg
ATR-1-15L25	84	70	90	70	50,5	1.60 kg
ATR-1-25L25	84	87	90	70	62	2.15 kg
ATR-1-35L25	108	90	112	90	66	3.10 kg
ATR-1-50L25	108	100	112	90	75	3.80 kg
ATR-1-75L25	120	120	122	100	92	5.80 kg
ATR-1100L25	135	128	135	112,5	92	7.50 kg
ATR-1130L25	150	140	144	125	105	9.60 kg
ATR-1160L20	150	140	144	125	105	11.50 kg
ATR-1200L20	174	142	160	145	110	13.20 kg