HPSPX-LP

Differential pressure PI controller

The HPSPX-LP series are high resolution differential pressure controllers (-125—125 Pa). The integrated PI control with anti-windup function offers the possibility to directly control EC motors / fans. They are equipped with a fully digital state-of-the-art pressure transducer designed for a wide range of applications. Zero point calibration and Modbus registers reset can be executed via a tact switch. They also feature integrated K-factor and an analogue / modulating output (0—10 VDC / 0—20 mA / 0—100 % PWM). All parameters are accessible via Modbus RTU (3SModbus software or Sensistant).

Key features

- Built-in digital high resolution differential pressure sensor
- Air velocity detection (by using an external PSET-PTX-200 Pitot tube connection set)
- Variety of operating ranges
- Selectable response time: 0,1—10 s
- Implemented K-factor
- Differential pressure, air volume flow(1) or air velocity(2) readout via Modbus RTU
- Modbus registers reset function (to factory pre-set values)
- Selectable internal voltage source for PWM output: 3,3 / 12 VDC
- Four LED indicators for the status of the transmitter and the controlled values
- Modbus RTU communication
- Sensor zero point calibration procedure
- Selectable minimum and maximum span
- Selectable analogue / modulating output
- Aluminium pressure connection nozzles

Article codes

Codes	Power supply	Maximum power consumption	Nominal power consumption	Imax	Operating range
HPSPF-LP	18—34 VDC	1,3W	1,26 W	71 mA	-125—125 Pa
HPSPG-LP	18—34 VDC 15—24 VAC ±10 %	1,3 W	1,26 W	70 mA	
		1 W	1 W		

Technical specifications

Selectable analogue / modulating output	0—10 VDC	R_L ≥ 50 kΩ
	0—20 mA	R_L ≤ 500 Ω
	0—100 % PWM	PWM Frequency: 1 kHz, R_L ≥ 50 kΩ
Operating modes		Differential pressure
		Air volume
		Air velocity
Accuracy		±2 % of the operating range
Protection standard		IP65 (according to EN 60529)
Enclosure		ASA, grey (RAL9002)
Ambient conditions	Temperature	-5—65 °C
	Rel. humidity	< 95 % rH (non-condensing)

Area of use

- Differential pressure, air volume flow(1) or air velocity (2) measurement in HVAC applications
- Overpressurizing applications: clean rooms to avoid particle contamination or staircases for fire safety
- Underpressurizing applications: restaurant kitchens and biohazard laboratories
- Volume flow application: ensuring the minimum legal ventilation rate (m³/h) for buildings

Wiring and connections

Article type	HPSPF-LP	HPSPG-LP	
Vin	18—34 VDC	18—34 VDC	13—26 VAC
GND	Ground	Common ground*	AC ~*
A	Modbus RTU (RS485), signal A		
/B	Modbus RTU (RS485), signal /B		
AO1	Analogue / modulating output (0—10 VDC / 0—20 mA / PWM)		
GND	Ground AO1	Common ground*	
Connections	Cable cross section		1,5 mm²

***Attention!** The -F version of the product is not suited for 3-wire connection. It has separate grounds for power supply and analogue output. Connecting both grounds together might result in incorrect measurements. Minimum 4 wires are required to connect -F type sensors.*
The -G version is intended for 3-wire connection and features a 'common ground'. This means that the ground of the analogue output is internally connected with the ground of the power supply. For this reason, -G and -F types cannot be used together on the same network. Never connect the common ground of -G type articles to other devices powered by a DC voltage. Doing so might cause permanent damage to the connected devices.

(1) *Only when K-factor of fan / drive is known. If K-factor is unknown, volume flow can be calculated via multiplying the duct cross-sectional area (A) by the air velocity (V) using the formula: Q = A * V*
(2) *Only when duct cross section is known by using an external PSET-PTX-200 Pitot tube connection set*

SENTERA CONTROLS

HPSPX-LP

Differential pressure PI controller

Settings

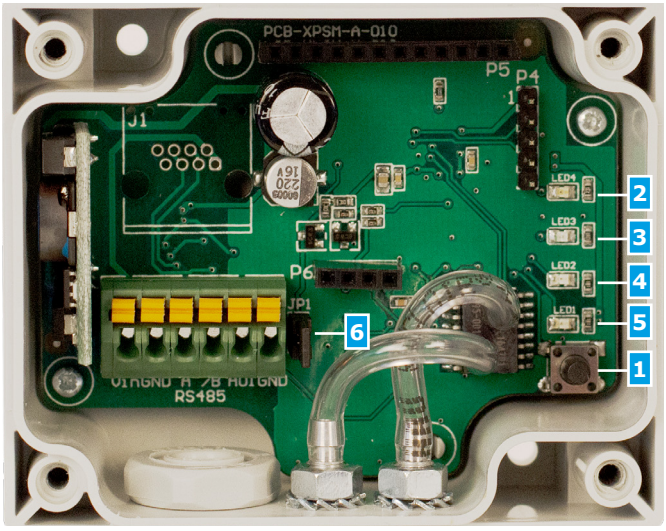

1 - Sensor zero point calibration and Modbus register reset tact switch (SW1)		Push to start Modbus RTU register factory reset or sensor zero point calibration
2 - Red LED4	Continuous	The differential pressure, air volume or air velocity has exceeded the minimum or maximum alarm threshold
	Blinking	Sensor element failure
3 - Yellow LED3	On	The differential pressure, air volume or air velocity has exceeded the minimum or maximum span threshold
4 - Green LED2	On	The actual differential pressure, air volume or air velocity is stabilized between the minimum span and maximum span
5 - Green LED1	On	Power OK; active Modbus RTU communication
6 - Internal pull-up resistor jumper JP1	■■*	PWM output is connected to internal +3,3 VDC or +12 VDC source**
	□□	PWM has to be connected to external voltage source via external pull-up resistor

* ■■ *indicates closed position of the jumper.*
*** The voltage source depends on the value in holding register 54.*

Standards

- EMC Directive 2014/30/EC:
  - EN 61326-1:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements
  - EN 61326-2-3:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 2-3: Particular requirements. Test configuration, operational conditions and performance criteria for transducers with integrated or remote signal conditioning
- WEEE Directive 2012/19/EC
- RoHs Directive 2011/65/EC

Operational diagrams

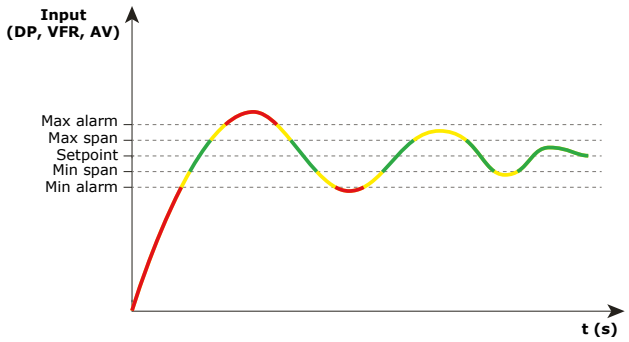

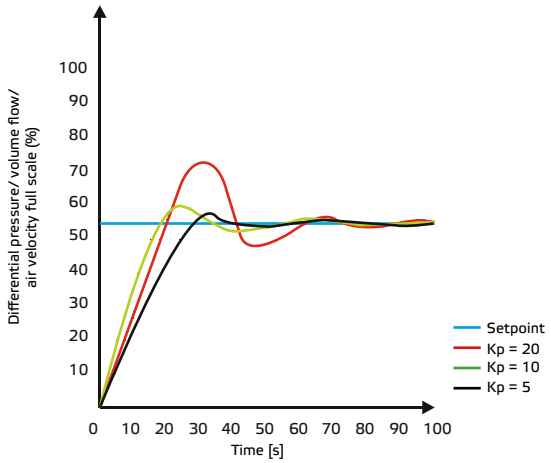

Fixing and dimensions

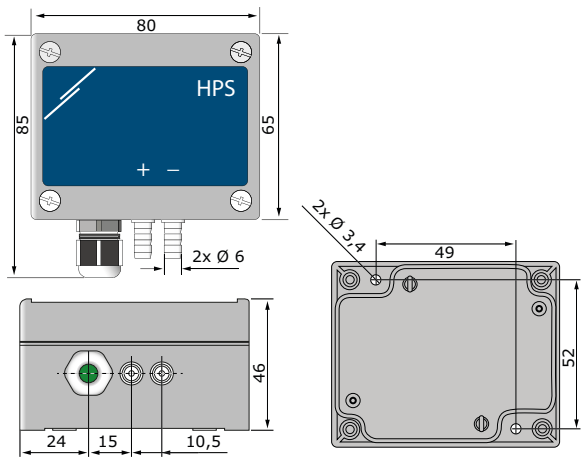

HPSPX-LP

Differential pressure PI controller

Application 1: Measuring differential pressure [Pa] or air flow volume [m³/h] using PSET-PVC

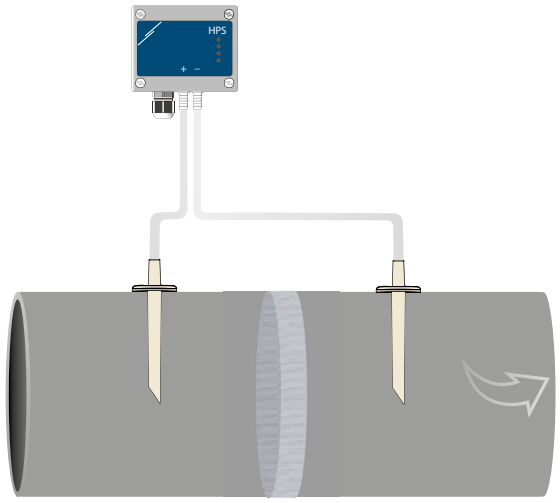

Application 2: Measuring supplied air volume [m³/h] or airflow velocity [m/s] using PSET-PT

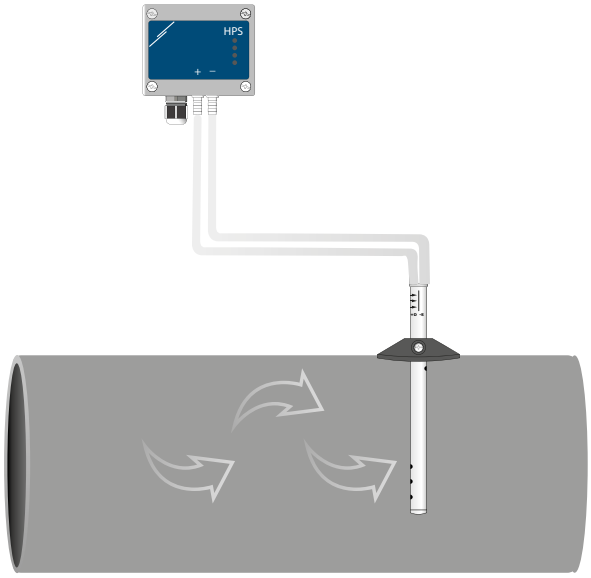

Modbus registers

The parameters of the unit can be monitored / configured through the 3SModbus software platform. You can download it from the following link:

https://www.sentera.eu/en/3SMCenter

For more information about the Modbus registers, please refer to the Modbus Register Map of the product.

Packaging



Article code	Packaging	Length [mm]	Width [mm]	Height [mm]	Net weight	Gross weight
HPSPF-LP HPSPG-LP	Unit (1 pc.)	95	85	70	0,12 kg	0,13 kg
	Carton (10 pcs.)	495	185	87	1,20 kg	1,30 kg
	Box (60 pcs.)	590	380	280	7,2 kg	7,8 kg

Global trade item numbers (GTIN)

Packaging	HPSPF-LP	HPSPG-LP
Unit	05401003007938	05401003007983
Carton	05401003301173	05401003301227
Box	05401003501696	05401003501740