

# HPSPM-LP

## Differential pressure PI controller



The HPSPM-LP are high resolution differential pressure controllers (-125–125 Pa). The integrated PI control with anti-windup function offers the possibility to directly control EC motors / fans. They are equipped with a fully digital state-of-the-art pressure transducer designed for a wide range of applications. Zero point calibration and Modbus registers reset can be executed via a tactile switch. All parameters are accessible via Modbus RTU (3SModbus software or Sensistant).

### Key features

- Built-in digital high resolution differential pressure sensor
- PI control with anti wind-up function and auto-tune function
- Active setpoint selection between differential pressure, volume flow or air velocity
- Air velocity control (by using an external PSET-PTX-200 Pitot tube connection set)
- Minimum and maximum output value selection
- Integrated K-factor
- Selectable response time: 0,1–10 s
- Differential pressure, volume flow<sup>(1)</sup> or air velocity<sup>(2)</sup> readout via Modbus RTU
- Modbus registers reset function (to factory pre-set values)
- Selectable internal voltage source for PWM output: 3,3 / 12 VDC
- Four LED indicators for the status of the controller and the controlled values
- Modbus RTU communication
- Zero-point calibration via tact switch
- Selectable minimum and maximum span
- Aluminium pressure connection nozzles



### Article codes

| Codes    | Power supply              | Connection                | Maximum power consumption |  | Imax   | Operating range      |
|----------|---------------------------|---------------------------|---------------------------|--|--------|----------------------|
| HPSPM-LP | 24 VDC, Power over Modbus | RJ45 connector on the PCB | 0,96 W                    |  | 0,72 W | 40 mA<br>-125–125 Pa |

### Technical specifications

|                     |                              |                            |
|---------------------|------------------------------|----------------------------|
| Power supply        | 24 VDC (Power over Modbus)   |                            |
| Output              | Modbus RTU (RS485)           |                            |
| Operating modes     | Differential pressure        |                            |
|                     | Volume flow <sup>(1)</sup>   |                            |
|                     | Air velocity <sup>(2)</sup>  |                            |
| Accuracy            | ±2 % of the operating range  |                            |
| Protection standard | IP65 (according to EN 60529) |                            |
| Ambient conditions  | Temperature                  | -5–65 °C                   |
|                     | Rel. humidity                | < 95 % rH (non-condensing) |

### Area of use

- Building and controlled ventilation
- Differential pressure, volume flow<sup>(1)</sup> or air velocity<sup>(2)</sup> measurement in HVAC applications
- Differential pressure / volume flow monitoring in clean rooms
- Clean air and non-aggressive, non-combustible gases

### Standards



- EMC Directive 2014/30/EC:
  - EN 61326-1:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements
  - EN 61326-2-3:2013 Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 2-3: Particular requirements. Test configuration, operational conditions and performance criteria for transducers with integrated or remote signal conditioning
- WEEE Directive 2012/19/EC
- RoHS Directive 2011/65/EC

### Modbus registers



The Sensistant Modbus configurator allows you to easily monitor and/or configure Modbus parameters.




The parameters of the unit can be monitored / configured through the 3SModbus software platform. You can download it from the following link:  
<https://www.sentera.eu/en/3SMCenter>

For more information about the Modbus registers, please refer to the product Modbus Register Map.

<sup>(1)</sup> Only when K-factor of fan / drive is known. If K-factor is unknown, volume flow can be calculated via multiplying the duct cross-sectional area (A) by the air velocity (V) using the formula:  $Q = A * V$   
<sup>(2)</sup> By using an external PSET-PTX-200 Pitot tube connection set


# HPSPM-LP

Differential pressure PI controller

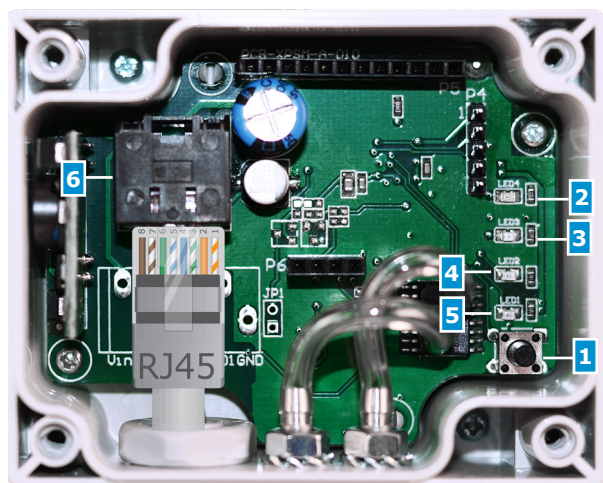

## Wiring and connections


|        |                                     |
|--------|-------------------------------------|
| 24 VDC | Supply voltage 24 VDC (max. 40 mA)  |
| GND    | Ground                              |
| A      | Modbus RTU communication, signal A  |
| /B     | Modbus RTU communication, signal /B |

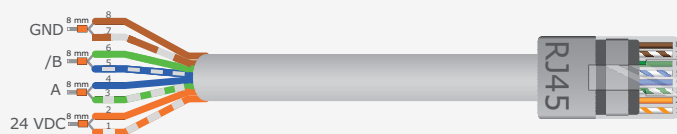


## Settings

|  |            |  |
|--|------------|--|
| 1 - Sensor calibration and Modbus register reset tact switch (SW1) |            | Push to start the Modbus RTU register factory reset or the sensor calibration  |
| 2 - Red LED4   | Continuous | The differential pressure, air volume or air velocity has exceeded the minimum or maximum alarm threshold  |
|  | Blinking   | Sensor element failure   |
| 3 - Yellow LED3  | On         | The differential pressure, air volume or air velocity has exceeded the minimum or maximum span threshold   |
| 4 - Green LED2   | On         | The actual differential pressure, air volume or air velocity is stabilized between the minimum span and maximum span   |
| 5 - Green LED1   | On         | Power OK; active Modbus RTU communication  |
| 6 - RJ45 Socket  |            | Modbus RTU communication and 24 VDC power supply:<br>Blinking green LED on the left indicates that data is transmitted;<br>Blinking green LED on the right indicates that data is received |


## Operational diagram

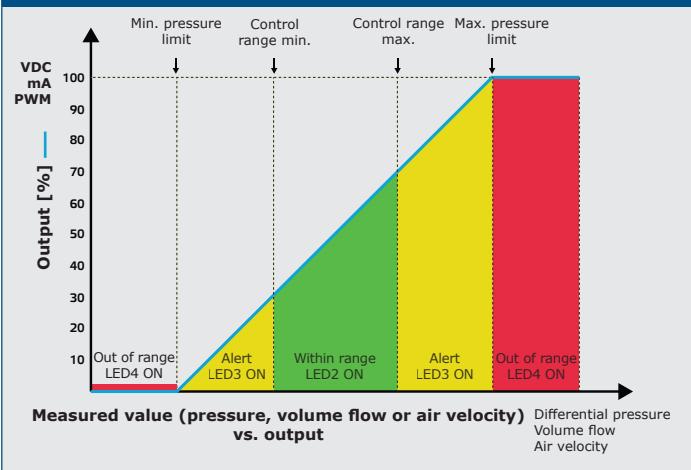

## Fixing and dimensions

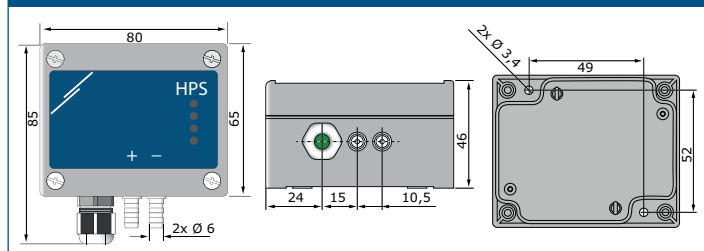

## Packaging




| Article  | Packaging        | Length [mm] | Width [mm] | Height [mm] | Net weight | Gross weight |
|----------|------------------|-------------|------------|-------------|------------|--------------|
| HPSPM-LP | Unit (1 pc.)     | 95          | 85         | 70          | 0,12 kg    | 0,13 kg      |
|          | Carton (10 pcs.) | 495         | 185        | 87          | 1,20 kg    | 1,30 kg      |
|          | Box (60 pcs.)    | 590         | 380        | 280         | 7,2 kg     | 7,8 kg       |

# HPSPM-LP

Differential pressure PI controller



**Application 1:** Measuring differential pressure [Pa] or volume flow [m<sup>3</sup>/h] using PSET-PVC

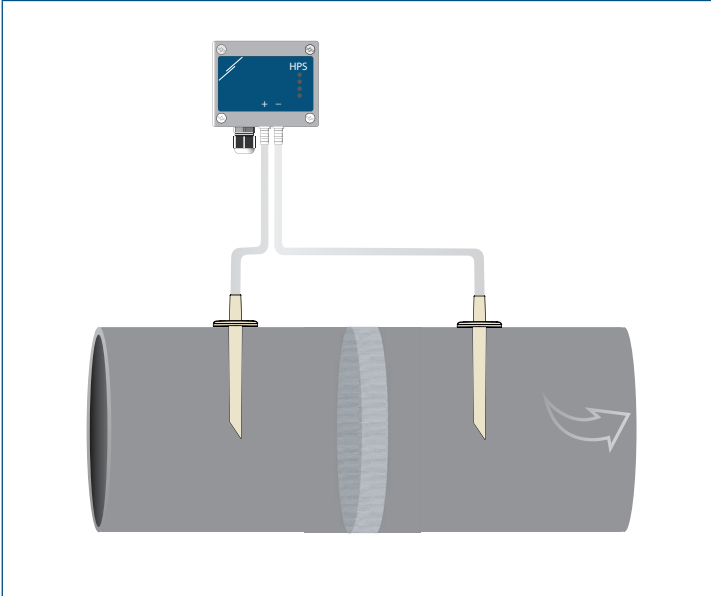

**Application 2:** Measuring supplied volume flow [m<sup>3</sup>/h] or air velocity [m/s] using PSET-PT

