
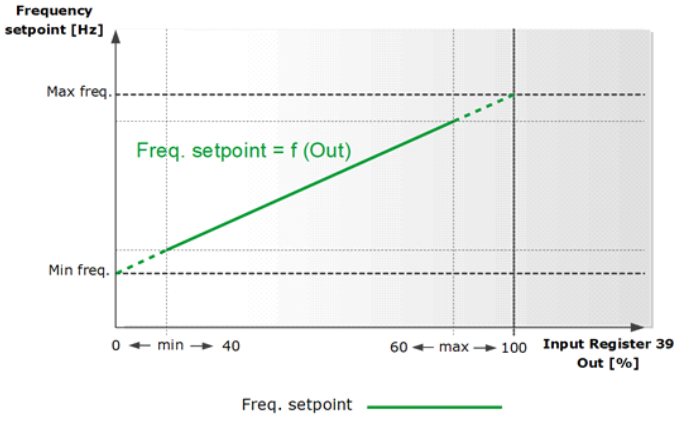
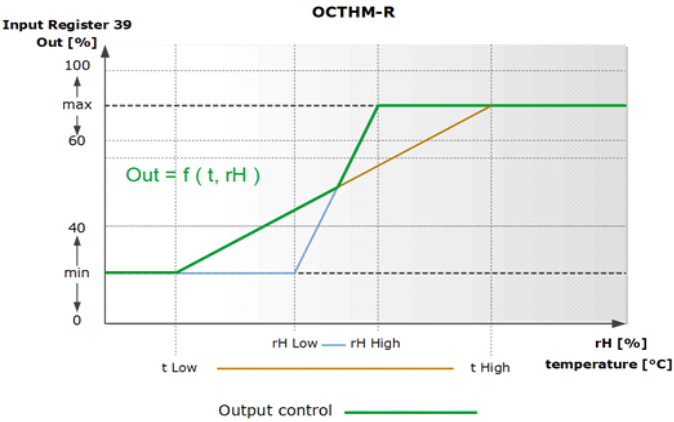


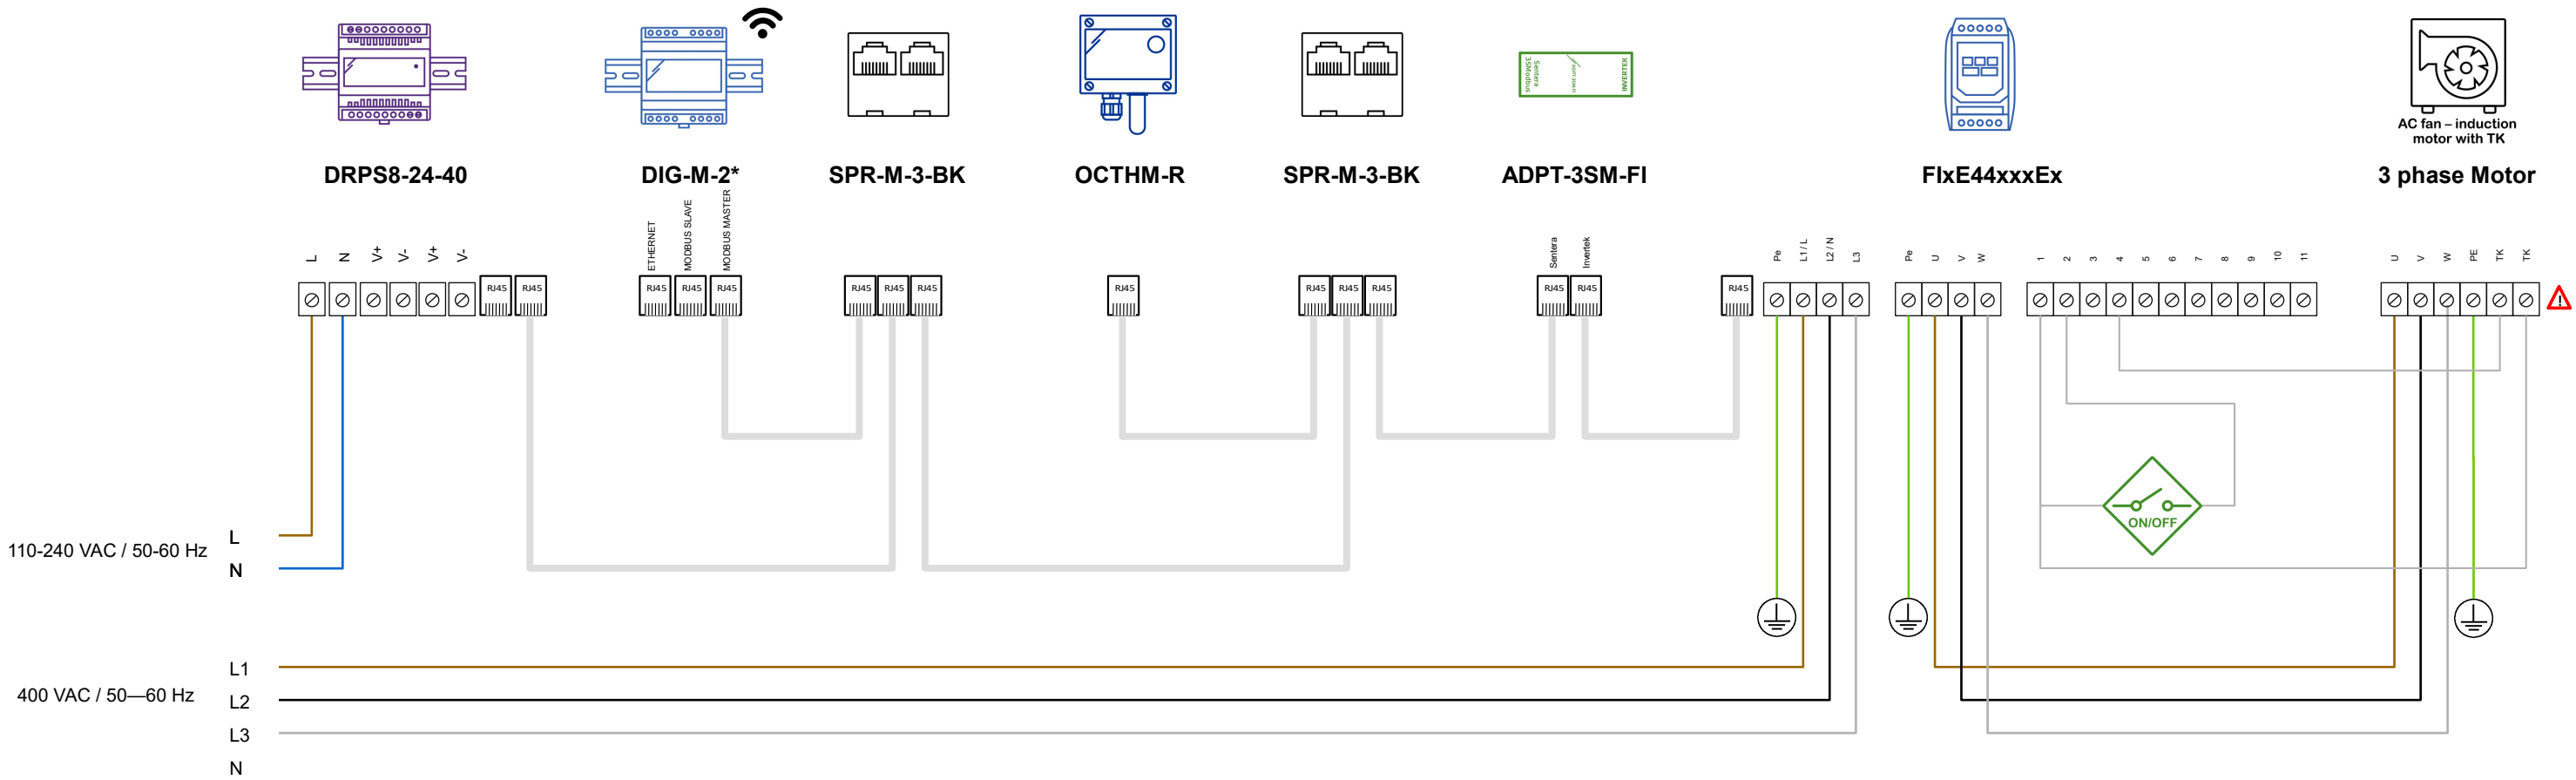

⚠ Consult the fan manufacturer for the correct wiring.

Sentera products		External products	Parameters settings			
Article codes	Description		Article codes	Parameters	Values	Descriptions
OCTHM-R FlxE44xxxEx DIG-M-2* DRPS8-24-40 ADPT-3SM-FI SPR-M-3-BK	Intelligent multifunctional outdoor sensor (T, rH) Frequency inverter 3 ph to 3 ph 400 VAC Sentera Internet Gateway, din-rail* Power Supply 24 V / 40 VA / 1,8 A, din-rail RJ45-to-RJ45 adapter 3-RJ45 splitter *Can be disconnected for standalone solution; when changes to solution are needed, gateway needs to be connected again.	400 VAC 3 ph AC induction motor with TK (normal closed) One on/off switch Standard network UTP cables Cat5E or higher	FlxE44xxxEx	P12 P14 P15 P30 = HR158 P01 = HR129, P02 = HR130, P07 = HR135, P08 = HR136, P09 = HR137	3 or 4 201 3 Auto 0 Motor parameters	Primary command source Extended menu access mode Digital input function select Start mode, automatic restart Motor parameters