
## AC motor 6 A | Remote variable speed control | TK monitoring | DIN rail



## $\triangle$ Consult the fan manufacturer for the correct wiring.

Sentera products		External products	Parameters settings			
Article codes	Description	AC motor 6 A	Article codes	Parameters	Values	Descriptions
MVSS1-60CDM SDP-M010-DC DHDR8-24-36	Remote control for AC fans with single-phase motor, equipped with thermal contacts. The maximum motor current is 6 A. The fan speed controller can be mounted on a DIN rail. Via the external potentiometer, fan speed can be set. At zero position, the motor stops. The TK monitoring function disables the motor in case of overheating. The maximum distance between potentiometer and fan speed controller should remain limited.					
This document is to be treated as an example or guideline only. Sentera bears no responsibility for any misprints, misinterpretations or mistakes in this document. Consult our disclaimer on https://www.sentera.eu/						

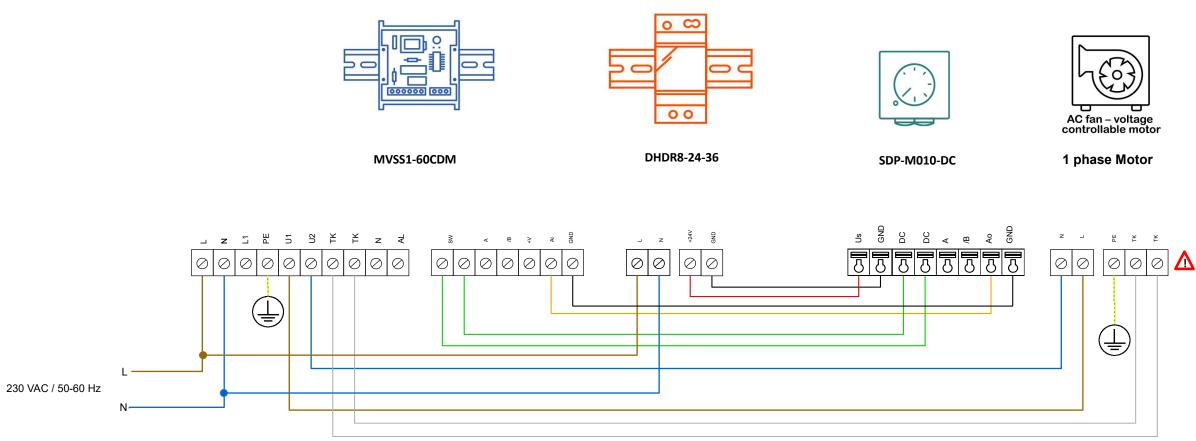

Solution ID: FS-R-000165

